




# LAMINATED SCANTLING

## Product Specification

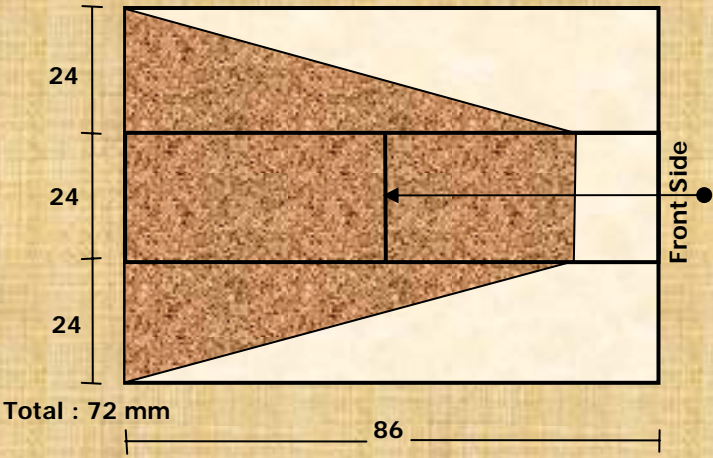

Optional middle layers :  
Edge gluing or finger joint

OUTER LAYER IN SIMILAR COLOR  
BOW/SPRING/TWIST MAXIMUM 1mm/m

## Technical Description



Free space of any defects such as :  
*pin hole, shot hole, sapwood, brittle heart, resin pockets, splits, decay and compression failure*



Small defects allowed such as :  
*pin hole, shot hole, sapwood, occasional pin-shotholes, minor splits*  
**NOT ALLOWED** : *decay, brittle heart and compression failure*

Moisture content	12 ± 2 %
Wood density	420 kg/m <sup>3</sup> and above
Glue used	D4
Surface property	Planed 4 side
Thickness	72, 78, 84 (+ 0 to 0.2 ) MM
Width	75, 86, 115, 120, 145 (+ 0 to 0.2 mm)
Length	700 – 3000 mm and 5900 mm (FJ all layer )
Species	Meranti, Kembang Semangkok, Bintangor, Durian, Merpauh

